

Yealink

#1 SIP PHONE IN SA

The global leading unified communication (UC) terminal provider

VOICE



VIDEO



MICROSOFT



HEADSETS



NOLOGY

Epsidon Technology Holdings

Official **Yealink** Distributor in SA




3 YEAR WARRANTY

MODEL	T53W	T54W	T57W	T58W	T58W Pro	VP59
DISPLAY						
LCD Display	3.7" 360x160 Pixel, LCD Display	4.3" 480x272 Pixel, Colour LCD Display	7" 800x480 Pixel, Colour-Touch LCD Display	7" 1024x600 Pixel, Colour-Touch LCD Display	7" 1024x600 Pixel, Colour Touch LCD Display	8" 1280x800 Pixel, Colour-Touch LCD Display
LCD Backlight	•	•	•	•	•	•
Android	N/A	N/A	N/A	•	•	•
HARDWARE						
Line Keys	8	10	N/A	N/A	N/A	N/A
Memory Keys	21 Keys (3-pages of 7 keys)	27 Keys (3-pages of 9 keys)	29 Touch Keys	27 Touch Keys	27 Touch Keys	29 Touch Keys
Bluetooth Wireless Handset	N/A	N/A	N/A	N/A	BTH58	N/A
Wall Mount	Optional	Optional	•	Optional	Optional	N/A
Voltage Rating	5V/1.2A	5V/2A	5V/2A	5V/2A	5V/2A	12V/2A
Expansion Module Support	•	•	•	•	•	N/A
AUDIO FEATURES						
HD Voice	•	•	•	•	•	•
Wideband Codec	Opus, G.722	Opus, G.722	Opus, G.722	Opus, G.722	Opus, G.722	Opus, G.722, G.722.1, G/722.1C
Narrowband Codec	PCMA, PCMU, G.729A/B, G.726, G.723.1, iLBC	PCMA, PCMU, G.729A/B, G.726, G.723.1, iLBC	PCMA, PCMU, G.729A/B, G.726, G.723.1, iLBC	PCMA, PCMU, G.729A/B, G.726, G.723.1, iLBC	PCMA, PCMU, G.729A/B, G.726, G.723.1, iLBC	PCMA, PCMU, G.729A/B, G.726, G.723.1, iLBC
Speakerphone	Full Duplex	Full Duplex	Full Duplex	Full Duplex	Full Duplex	Full Duplex
INTERFACE						
Ethernet Ports	2	2	2	2	2	2
Ethernet Interface	10/100/1000 Mbps	10/100/1000 Mbps	10/100/1000 Mbps	10/100/1000 Mbps	10/100/1000 Mbps	10/100/1000 Mbps
PoE Support	Yes	Yes	Yes	Yes	Yes	Yes
USB Ports	1	1	1	1	1	1
Wi-Fi Type	Dual-band (2.4GHz and 5GHz)	Dual-band (2.4GHz and 5GHz)	Dual-band (2.4GHz and 5GHz)	Dual-band (2.4GHz and 5GHz)	Dual-band (2.4GHz and 5GHz)	Dual-band (2.4GHz and 5GHz)
TELEPHONE FEATURES						
SIP Accounts	12	16	16	16	16	16
Conferencing (With Terminal)	3 Parties (multi-party dependent on server)	3 Parties (multi-party dependent on server)	5 Parties (multi-party dependent on server)	10 Parties, (multi-party dependent on server)	10 Parties, (multi-party dependent on server)	10 Party mixed Video/Audio (max 2 Video calls)
Speed Dial	•	•	•	•	•	•
BLF	•	•	•	•	•	•
BLA	•	•	•	•	•	•
Call Transfer	•	•	•	•	•	•
Call Forward	•	•	•	•	•	•
Call Waiting	•	•	•	•	•	•
XML Browser	•	•	•	•	•	•
Local Phonebook	1000 Entries	1000 Entries	1000 Entries	1000 Entries	1000 Entries	1000 Entries
XML Phonebook	•	•	•	•	•	•
LDAP Phonebook	•	•	•	•	•	•
SECURITY AND CONFIGURATION						
SRTP/TLS/HTTPS	•	•	•	•	•	•
OpenVPN	•	•	•	•	•	•
Auto Provisioning	FTP/TFTP/HTTP/HTTPS	FTP/TFTP/HTTP/HTTPS	FTP/TFTP/HTTP/HTTPS	FTP/TFTP/HTTP/HTTPS	FTP/TFTP/HTTP/HTTPS	FTP/TFTP/HTTP/HTTPS
ACCESSORIES (OPTIONAL)						
Expansion Module	EXP50	EXP50	EXP50	EXP50	EXP50	N/A
Power Adapter	PSU-MONO	PSU-COLOUR	PSU-COLOUR	PSU-COLOUR	PSU-COLOUR	PSU-12V/1A
Headset	RJ-9 (YHS3X) Bluetooth (BH7X) USB (WH6X, UH3X)	RJ-9 (YHS3X) Bluetooth (BH7X) USB (WH6X, UH3X)	RJ-9 (YHS3X) Bluetooth (BH7X) USB (WH6X, UH3X)	RJ-9 (YHS3X) Bluetooth (BH7X) USB (WH6X, UH3X)	RJ-9 (YHS3X) Bluetooth (BH7X) USB (WH6X, UH3X)	RJ-9 (YHS3X) Bluetooth (BH7X) USB (WH6X, UH3X)
Bluetooth USB Dongle	Built-in	Built-in	Built-in	Built-in	Built-in	Built-in
Wi-Fi USB Dongle	Built-in	Built-in	Built-in	Built-in	Built-in	Built-in
Camera	N/A	N/A	N/A	CAM50	CAM50	Included
DECT Support	DD10K - Base Station	DD10K - DD Phone	DD10K - Base Station	DD10K - Base Station	DD10K - Base Station	DD10K - Base Station



3 YEAR WARRANTY

MODEL	T31P	T33G	T43U	T46U	T48U
DISPLAY					
LCD Display	2.3" 132x64 Pixel, LCD Display	2.4" 320x240 Pixel, Colour LCD Display	3.7" 360x160 Pixel, LCD Display	4.3" 480x272 Pixel, Colour LCD display	7" 800x480 Pixel, Colour Touch LCD Display
LCD Backlight	•	•	•	•	•
Android	N/A	N/A	N/A	N/A	N/A
HARDWARE					
Line Keys	2	4	8	10	N/A
Memory Keys	N/A	N/A	21 Keys (3-pages of 7 keys)	27 Keys (3-pages of 9 keys)	29 Touch Keys
Bluetooth Wireless Handset	N/A	N/A	N/A	N/A	N/A
Wall Mount	•	•	•	•	•
Voltage Rating	5V/600mA	5V/600mA	5V/1.2A	5V/2A	5V/2A
Expansion Module Support	N/A	N/A	•	•	•
AUDIO FEATURES					
HD Voice	•	•	•	•	•
Wideband Codec	Opus, G.722	Opus, G.722	Opus, G.722	Opus, G.722	Opus, G.722
Narrowband Codec	Opus, G.711 µ/A, G.729A/B, G.726, G.723.1, iLBC	Opus, G.711 µ/A, G.729A/B, G.726, G.723.1, iLBC	Opus, G.711 µ/A, G.729A/B, G.726, G.723.1, iLBC	Opus, G.711 µ/A, G.729A/B, G.726, G.723, iLBC	Opus, G.711 µ/A, G.729A/B, G.726, G.723.1, iLBC
Speakerphone	Full Duplex	Full Duplex	Full Duplex	Full Duplex	Full Duplex
INTERFACE					
Ethernet Ports	2	2	2	2	2
Ethernet Interface	10/100Mbps	10/100/1000 Mbps	10/100/1000 Mbps	10/100/1000 Mbps	10/100/1000 Mbps
PoE Support	Yes	Yes	Yes	Yes	Yes
USB Ports	N/A	N/A	2	2	2
Wi-Fi Type	N/A	N/A	Optional	Optional	Optional
TELEPHONE FEATURES					
SIP Accounts	2	4	12	16	16
Conferencing (With Terminal)	5 Parties (multi-party dependent on server)	5 Parties (multi-party dependent on server)	5 Parties (multi-party dependent on server)	10 Parties (multi-party dependent on server)	10 Parties (multi-party dependent on server)
Speed Dial	•	•	•	•	•
BLF	•	•	•	•	•
BLA	•	•	•	•	•
Call Transfer	•	•	•	•	•
Call Forward	•	•	•	•	•
Call Waiting	•	•	•	•	•
XML Browser	•	•	•	•	•
Local Phonebook	1000 Entries	1000 Entries	1000 Entries	1000 Entries	1000 Entries
XML Phonebook	•	•	•	•	•
LDAP Phonebook	•	•	•	•	•
SECURITY AND CONFIGURATION					
SRTP/TLS/HTTPS	•	•	•	•	•
OpenVPN	•	•	•	•	•
Auto Provisioning	FTP/TFTP/HTTP/HTTPS	FTP/TFTP/HTTP/HTTPS	FTP/TFTP/HTTP/HTTPS	FTP/TFTP/HTTP/HTTPS	FTP/TFTP/HTTP/HTTPS
ACCESSORIES (OPTIONAL)					
Expansion Module	N/A	N/A	EXP43	EXP43	EXP43
Power Adapter	PSU-MONO	PSU-MONO	PSU-MONO	PSU-COLOUR	PSU-COLOUR
Headset	RJ-9 (YHS3X)	RJ-9 (YHS3X)	RJ-9 (YHS3X) USB (WH6X, UH3X) Bluetooth via BT41 (BH7X)	RJ-9 (YHS3X) USB (WH6X, UH3X) Bluetooth via BT41 (BH7X)	RJ-9 (YHS3X) USB (WH6X, UH3X) Bluetooth via BT41 (BH7X)
Bluetooth USB Dongle	N/A	N/A	BT41	BT41	BT41
Wi-Fi USB Dongle	N/A	N/A	WF40/ WF50	WF40/ WF50	WF40/ WF50
Camera	N/A	N/A	N/A	N/A	N/A
DECT Support	N/A	N/A	N/A	N/A	N/A

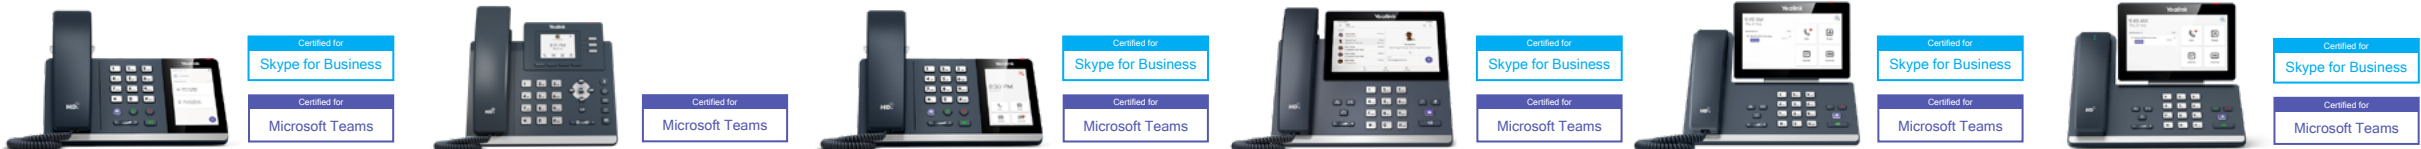

2 YEAR WARRANTY

MODEL	MP50	MP52	MP54	MP56	MP58	MP58-WH
DISPLAY						
LCD Display	4" 480x800 Pixel, Colour-Touch LCD Display	2.4" 320x240 Monochrome Display	4" 480x800 Pixel, Colour-Touch LCD Display	7" 480x800 Pixel, Colour-Touch LCD Display	7" 1024x600 Pixel, Colour-Touch LCD Display	7" 1024x600 Pixel, Colour-Touch LCD Display
LCD Backlight	•	•	•	•	•	•
Android	N/A	•	•	•	•	•
HARDWARE						
Bluetooth Wireless Handset	N/A	N/A	N/A	N/A	N/A	BTH58
Hearing Aid Compliant (HAC)	•	•	•	•	•	•
Wall Mount	•	•	N/A	N/A	N/A	N/A
Microsoft Teams Button	•	N/A	•	•	•	•
Voltage Rating	12V/1A	5V/2A	5V/1A	5V/2A	5V/2A	5V/2A
Expansion Module Support	N/A	N/A	N/A	•	•	•
AUDIO FEATURES						
HD Voice	•	•	•	•	•	•
Yealink Noise Proof Technology	•	•	•	•	•	•
Speakerphone	•	•	•	•	•	•
INTERFACE						
Ethernet Ports	N/A	2	2	2	2	2
Ethernet Interface	N/A	10/100/1000Mbps	10/100/1000Mbps	10/100/1000Mbps	10/100/1000Mbps	10/100/1000Mbps
PoE Support	N/A	Yes	Yes	Yes	Yes	Yes
USB Ports	3	1	1	1	2	2
Wi-Fi Type	N/A	N/A	Optional	Dual-band (2.4GHz and 5GHz)	Dual-band (2.4GHz and 5GHz)	Dual-band (2.4GHz and 5GHz)
TELEPHONE FEATURES						
Microsoft Teams Client	Via PC (USB)	Built-in	Built-in	Built-in	Built-in	Built-in
Call Transfer	N/A	•	•	•	•	•
Call Forward	N/A	•	•	•	•	•
Call Waiting	N/A	•	•	•	•	•
XML Browser	N/A	•	•	•	•	•
Meeting Call Control	N/A	•	•	•	•	•
Presence Integration	N/A	•	•	•	•	•
SECURITY AND CONFIGURATION						
SRTP/TLS/HTTPS	N/A	•	•	•	•	•
OpenVPN	N/A	N/A	N/A	N/A	N/A	N/A
Auto Provisioning	N/A	•	•	•	•	•
ACCESSORIES (OPTIONAL)						
Expansion Module	N/A	N/A	N/A	EXP50	EXP50	EXP50
Power Adapter	Built-in	PSU-COLOUR	PSU-COLOUR	PSU-COLOUR	PSU-COLOUR	PSU-COLOUR
Headset	Bluetooth (BH7X)	USB (WH6X, UH3X)	USB (WH6X, UH3X), Bluetooth (BH7X)	USB (WH6X, UH3X), Bluetooth (BH7X)	USB (WH6X, UH3X), Bluetooth (BH7X)	USB (WH6X, UH3X), Bluetooth (BH7X)
Bluetooth USB Dongle	BT50	N/A	BT41	Built-in	Built-in	Built-in
Wi-Fi USB Dongle	N/A	N/A	WF50	Built-in	Built-in	Built-in



2 YEAR WARRANTY

MODEL	EXP43	EXP50
DISPLAY		
LCD Display	4.3" 480x272 Pixel, Colour LCD Display	4.3" 480x272 Pixel, Colour LCD Display
LCD Backlight	•	•
Page Views	3	3
FEATURES KEYS AND INDICATORS		
Physical Keys	20	20
Dual Colour LEDs	•	•
Extensions	60	60
Independent Switch Key	•	•
All Keys Programmable	Shared Line, BLF List, Call Park, etc.	Shared Line, BLF List, Call Park, etc.
Microsoft Teams Support	N/A	•
PHYSICAL FEATURES		
Wall Mountable	N/A	N/A
Stand	2 Adjustable Angles	2 Adjustable Angles
Powered by Phone	1 Module	1 Module
Max. Modules in Daisy Chain	3 (2 with independent power)	3 (2 with independent power)
Interface	USB	USB
Phone Models Supported	T43U, T46U, T48U	T53W, T54W, T57W, T58W, MP56, MP58, MP58-WH

2 YEAR WARRANTY

MODEL	CP925	CP935W	CP965
DISPLAY			
LCD Display	4" 480x800 Pixel, Colour, Touch LCD Display	3.1" 248x120 Pixel, LCD Display	5" 720x1280 Pixel, Colour, Touch LCD Display
LCD Backlight	•	•	•
HARDWARE			
Soft Keys	N/A	N/A	N/A
Voltage Rating	POE, YLPOE30 - Optional	DC12V/1A	POE, YLPOE30 - Optional
AUDIO FEATURES			
Internal Microphone Array	6	6-microphone array	12
Voice Pickup	360 Degree	360 Degree	360 Degree
Speaker	5W	5W	5W
Echo Cancellation	Up to 320ms Tail Length	Up to 240ms Tail Length	Up to 320ms Tail Length
Noise	Yealink Noise Proof Technology	Yealink Noise Proof Technology	Yealink Noise Proof Technology
INTERFACE			
Ethernet Interfaces	1 x 10/100 Mbps	N/A	1 x 10/100 Mbps
PoE	•	N/A	•
Microphone Ports	N/A	N/A	N/A
USB	1 x USB Type-C	1 x Micro USB Port	1 x USB Type-A, 1 x USB Type-C
Mobile Phone/PC Port	N/A	N/A	N/A
FEATURES			
Android	N/A	N/A	•
HD Voice	•	•	•
Wi-Fi Support	Built-in	N/A	Built-in
Bluetooth Support	Built-in	Built-in	Built-in
Speakerphone	Full Duplex	Full Duplex	Full Duplex
Microphone Expansion Modules	Optional	Optional	Optional
SIP Accounts	1	1	1
Cordless	N/A	•	N/A
Talk / Standby Times	N/A	Talk 24 Hours, Standby 15 Days	N/A
ACCESSORIES (OPTIONAL)			
Wireless Microphone	CPW25 - Optional	CPW25 - Optional	CPW65 - Optional
PoE Adapter	YLPOE30 - Optional	N/A	YLPOE30 - Optional
DECT Base Station Compatibility	N/A	W70B, W80B, W90B - Optional	N/A



2 YEAR WARRANTY

MODEL	W73P	W76P	W78P	W80B/W80DM	W90B/W90DM
DISPLAY					
LCD Display	1.8" 128x160 Pixel, Colour LCD Display	2.4" 240x320 Pixel, Colour LCD Display	2.4" 240x320 Pixel, Colour LCD Display	N/A	N/A
LCD Backlight	•	•	•	N/A	N/A
HARDWARE					
Wall Mount	•	•	•	•	•
External Antennas	N/A	N/A	N/A	N/A	•
Voltage Rating	5V600mA	5V600mA	5V600mA	5V/1.2A	5V/1.2A
AUDIO FEATURES					
HD Voice	•	•	•	•	•
Wideband Codec	Opus, AMR-WB (optional), G.722	Opus, AMR-WB (optional), G.722	Opus, AMR-WB (optional), G.722	Opus, AMR-WB (optional), G.722	Opus, AMR-WB (optional), G.722
Narrowband Codec	PCMU, PCMA, G.726, G.729, G.729A, iLBC	PCMU, PCMA, G.726, G.729, G.729A, iLBC	PCMU, PCMA, G.726, G.729, G.729A, iLBC	PCMU, PCMA, G.726, G.729, iLBC	PCMU, PCMA, G.726, G.729, iLBC
Speakerphone	Full Duplex	Full Duplex	Full Duplex	N/A	N/A
INTERFACE					
Ethernet Ports	1	1	1	1	1
Ethernet Interfaces	10/100 Mbps	10/100 Mbps	10/100 Mbps	10/100 Mbps	10/100 Mbps
PoE	•	•	•	•	•
Headset	3.5mm	3.5mm	Bluetooth	N/A	N/A
LAN Synchronisation	N/A	N/A	N/A	N/A	•
MULTI-CELL DECT					
Multi-Cell DECT Support	N/A	N/A	N/A	•	•
TELEPHONE FEATURES					
SIP Accounts	10 (20 simultaneous calls)	10 (20 simultaneous calls)	10 (20 simultaneous calls)	100 simultaneous calls across 30 base stations. 8 calls per base station	250 simultaneous calls across 60 base stations. 8 calls per base station
Conferencing (With Terminal)	3 parties (multi-party dependent on server)	3 parties (multi-party dependent on server)	3 parties (multi-party dependent on server)	3 parties (multi-party dependent on server)	3 parties (multi-party dependent on server)
Speed Dial	•	•	•	•	•
Call Transfer	•	•	•	•	•
Call Forward	•	•	•	•	•
Call Waiting	•	•	•	•	•
Local Phonebook	1000 Entries	1000 Entries	1000 Entries	100 Entries per handset	100 Entries per handset
Range	50m Indoors, 300m Outdoors	50m Indoors, 300m Outdoors	50m Indoors, 300m Outdoors	50m Indoors, 300m Outdoors	50m Indoors, 300m Outdoors
Talk Time	35 Hours, 400 Hours Standby	30 Hours, 400 Hours Standby	21 Hours, 166 Hours Standby	N/A	N/A
Repeater	•	•	•	N/A	N/A
SECURITY AND CONFIGURATION					
SRTP/TLS/HTTPS	•	•	•	•	•
OpenVPN	•	•	•	•	•
Auto Provisioning	FTP/TFTP/HTTP/HTTPS	FTP/TFTP/HTTP/HTTPS	FTP/TFTP/HTTP/HTTPS	FTP/TFTP/HTTP/HTTPS/RPS	FTP/TFTP/HTTP/HTTPS/RPS
ACCESSORIES (OPTIONAL)					
DECT Repeater RT30	•	•	•	N/A	N/A
Additional Handset	W73H	W56H	W78H	W73H, W56H, W57R, W59R, W78H, CP935W, DD Phone	W73H, W56H, W57R, W59R, W78H, CP935W, DD Phone



2 YEAR WARRANTY

MODEL	W56H	W73H	W78H	W57R	W59R
DISPLAY					
LCD Display	2.4" 240x320 Pixel, Colour LCD Display	1.8" 128x160 Pixel, Colour LCD Display	2.4" 240x320 Pixel, Colour LCD Display	1.8" 128x160 Pixel, Colour LCD Display	1.8" 128x160 Pixel, Colour LCD Display
LCD Backlight	•	•	•	•	•
HARDWARE					
Wall Mount	•	•	•	•	•
Voltage Rating	5V600mA	5V600mA	5V600mA	5V600mA	5V600mA
Battery Type	Li-ion	Li-ion	Li-ion	Li-ion	Li-ion
Headset	3.5mm	3.5mm	Bluetooth	N/A	Bluetooth
AUDIO FEATURES					
HD Voice	•	•	•	•	•
Wideband Codec	Opus, AMR-WB (optional), G.722	Opus, AMR-WB (optional), G.722	Opus, AMR-WB (optional), G.722	Opus, AMR-WB (optional), G.722	Opus, AMR-WB (optional), G.722
Narrowband Codec	PCMU, PCMA, G.726, G.729, iLBC	PCMU, PCMA, G.726, G.729, G.729A, iLBC	PCMU, PCMA, G.726, G.729, iLBC	PCMU, PCMA, G.726, G.729, iLBC	PCMU, PCMA, G.726, G.729, iLBC
Speakerphone	Full Duplex	Full Duplex	Full Duplex	Full Duplex	Full Duplex
MULTI-CELL DECT					
Multi-Cell DECT Support	•	•	•	•	•
TELEPHONE FEATURES					
Simultaneous Calls	2 per Handset	2 per Handset	2 per Handset	2 per Handset	2 per Handset
Conferencing (with terminal)	3 parties (multi-party dependent on server)	3 parties (multi-party dependent on server)	3 parties (multi-party dependent on server)	3 parties (multi-party dependent on server)	3 parties (multi-party dependent on server)
Speed Dial	•	•	•	•	•
Call Transfer	•	•	•	•	•
Call Forward	•	•	•	•	•
Call Waiting	•	•	•	•	•
Local Phonebook	100 Entries	100 Entries	100 Entries	100 Entries	100 Entries
Range	50m Indoors, 300m Outdoors	50m Indoors, 300m Outdoors	50m Indoors, 300m Outdoors	50m Indoors, 300m Outdoors	50m Indoors, 300m Outdoors
Talk Time	30 Hours, 400 Hours Standby	35 Hours, 400 Hours Standby	21 Hours, 166 Hours Standby	40 Hours, 575 Hours Standby	28 Hours, 360 Hours Standby
Vibration Alert	N/A	N/A	•	•	•
Alarm Function	N/A	N/A	N/A	Push Button	Button press/No movement Man down alarm
SECURITY AND CONFIGURATION					
SRTP/TLS/HTTPS	•	•	•	•	•
OpenVPN	•	•	•	•	•
Auto Provisioning	FTP/TFTP/HTTP/HTTPS	FTP/TFTP/HTTP/HTTPS	FTP/TFTP/HTTP/HTTPS/RPS	FTP/TFTP/HTTP/HTTPS/RPS	FTP/TFTP/HTTP/HTTPS/RPS
BASE STATION SUPPORT					
DECT Base Station Compatibility	W70B, W80B, W90B	W70B, W80B, W90B	W70B, W80B, W90B	W70B, W80B, W90B	W70B, W80B, W90B

Yealink
RJ-9 HEADSETS



2 YEAR WARRANTY

MODEL	YHS34-LITE	YHS34	YHS36
PHYSICAL FEATURES			
Ear Piece	Monaural (Single Earpiece) - YHS34-LITE-MONO Binaural (Dual Earpiece) - YHS34-LITE-DUAL	Monaural (Single Earpiece) - YHS34-MONO Binaural (Dual Earpiece) - YHS34-DUAL	Monaural (Single Earpiece) - YHS36-MONO Binaural (Dual Earpiece) - YHS36-DUAL
Primary Connection / Interface	RJ-9	RJ-9	RJ-9
Alternate Connection / Interface	N/A	N/A	N/A
Call Management Control Unit	N/A	N/A	N/A
Quick Disconnect (QD) Cord	•	•	•
Easy Ear Cushion Replacement	•	•	•
Ear Cushion Type	Foam	Leatherette	Leatherette
Wireless Connectivity	N/A	N/A	N/A
Range	N/A	N/A	N/A
Talk Time	N/A	N/A	N/A
USB Hub	N/A	N/A	N/A
Screen	N/A	N/A	N/A
FEATURES KEYS AND INDICATORS			
Noise Cancelling Microphone	•	•	•
Audio	N/A	N/A	N/A
Microsoft Teams Integration	N/A	N/A	N/A
YEALINK INTEGRATION			
Yealink Phone Integration	•	•	•
Yealink Device Management	N/A	N/A	N/A
Desktop Phone Models Supported	All Yealink Desktop IP Phones	All Yealink Desktop IP Phones	All Yealink Desktop IP Phones
DECT Phone Models Supported (via 3.5mm)	N/A	N/A	N/A
ACCESSORIES (OPTIONAL)			
Busylight Bar	N/A	N/A	N/A
Neckband	N/A	N/A	N/A
Wireless Mobile Phone Charger	N/A	N/A	N/A

Yealink
USB HEADSETS



2 YEAR WARRANTY

MODEL	UH34-LITE	UH34	UH36	UH38
PHYSICAL FEATURES				
Ear Piece	Monaural (Single Earpiece) - UH34-LITE-MONO Binaural (Dual Earpiece) - UH34-LITE-DUAL	Monaural (Single Earpiece) - UH34-MONO Binaural (Dual Earpiece) - UH34-DUAL	Monaural (Single Earpiece) - UH36-MONO Binaural (Dual Earpiece) - UH36-DUAL	Monaural (Single Earpiece) - UH38-MONO Binaural (Dual Earpiece) - UH38-DUAL
Primary Connection / Interface	USB	USB	USB	USB and Bluetooth
Alternate Connection / Interface	N/A	N/A	3.5mm	N/A
Call Management Control Unit	In-line	In-line	In-line	In-line
Quick Disconnect (QD) Cord	N/A	N/A	N/A	N/A
Easy Ear Cushion Replacement	•	•	•	N/A
Ear Cushion Type	Foam	Leatherette	Leatherette	Leatherette
Wireless Connectivity	N/A	N/A	N/A	Bluetooth
Range	N/A	N/A	N/A	10m
Talk Time	N/A	N/A	N/A	8 Hours (UH38-DUAL only)
USB Hub	N/A	N/A	N/A	N/A
Screen	N/A	N/A	N/A	N/A
FEATURES KEYS AND INDICATORS				
Noise Cancelling Microphone	•	•	•	•
Audio	N/A	N/A	Dynamic EQ (20Hz-20kHz)	Dynamic EQ (20Hz-20kHz)
Microsoft Teams Integration	•	•	•	•
YEALINK INTEGRATION				
Yealink Phone Integration	•	•	Advanced	•
Yealink Device Management	•	•	•	•
Desktop Phone Models Supported	T42U, T43U, T46U, T48U, T53W, T54W, T57W, T58W, T58W-PRO, VP59, MP52, MP54, MP56, MP58	T42U, T43U, T46U, T48U, T53W, T54W, T57W, T58W, T58W-PRO, VP59, MP52, MP54, MP56, MP58	T42U, T43U, T46U, T48U, T53W, T54W, T57W, T58W, T58W-PRO, VP59, MP52, MP54, MP56, MP58	T42U, T43U, T46U, T48U, T53W, T54W, T57W, T58W, T58W-PRO, VP59, MP52, MP54, MP56, MP58
DECT Phone Models Supported (via 3.5mm)	N/A	N/A	W56H, W73H, W73P, W76P	N/A
ACCESSORIES (OPTIONAL)				
Busylight Bar	N/A	N/A	N/A	N/A
Neckband	N/A	N/A	N/A	N/A
Wireless Mobile Phone Charger	N/A	N/A	N/A	N/A



2 YEAR WARRANTY

MODEL	WH62	WH63	WH66	WH67
PHYSICAL FEATURES				
Ear Piece	Monaural (Single Earpiece) - WH62-MONO Binaural (Dual Earpiece) - WH62-DUAL	Monaural (Single Earpiece)	Monaural (Single Earpiece) - WH66-MONO Binaural (Dual Earpiece) - WH66-DUAL	Monaural (Single Earpiece)
Primary Connection / Interface	USB	USB	USB	USB
Alternate Connection / Interface	N/A	N/A	Bluetooth	Bluetooth
Call Management Control Unit	On Base Station	On Base Station	On Base Station	On Base Station
Quick Disconnect (QD) Cord	N/A	N/A	N/A	N/A
Easy Ear Cushion Replacement	•	N/A	•	N/A
Ear Cushion Type	Leatherette	N/A	Leatherette	N/A
Wireless Connectivity	DECT (To Base Station)	DECT (To Base Station)	DECT (To Base Station) Bluetooth (Base Station to Mobile Phone)	DECT (To Base Station) Bluetooth (Base Station to Mobile Phone)
Range	160m	120m	150m	120m
Talk Time	13 Hours	8 Hours	13 Hours	8 Hours
USB Hub	N/A	N/A	2 Port USB 3.0	2 Port USB 3.0
Screen	N/A	N/A	4" Capacitive Touch Screen	4" Capacitive Touch Screen
FEATURES KEYS AND INDICATORS				
Noise Cancelling Microphone	•	•	•	•
Audio	Dynamic EQ (20Hz-10kHz)	Dynamic EQ (20Hz-10kHz)	Dynamic EQ (20Hz-10kHz)	Dynamic EQ (20Hz-10kHz)
Microsoft Teams Integration	•	•	•	•
YEALINK INTEGRATION				
Yealink Phone Integration	•	•	•	•
Yealink Device Management	•	•	•	•
Desktop Phone Models Supported	T42U, T43U, T46U, T48U, T53W, T54W, T57W,T58W, T58W-PRO, VP59, MP52, MP54, MP56, MP58	T42U, T43U, T46U, T48U, T53W, T54W, T57W,T58W, T58W-PRO, VP59, MP52, MP54, MP56, MP58	T42U, T43U, T46U, T48U, T53W, T54W, T57W,T58W, T58W-PRO, VP59, MP52, MP54, MP56, MP58	T42U, T43U, T46U, T48U, T53W, T54W, T57W,T58W, T58W-PRO, VP59, MP52, MP54, MP56, MP58
DECT Phone Models Supported (via 3.5mm)	N/A	N/A	N/A	N/A
ACCESSORIES (OPTIONAL)				
Busylight Bar	•	•	•	•
Neckband	N/A	•	N/A	•
Wireless Mobile Phone Charger	N/A	N/A	•	•



2 YEAR WARRANTY

MODEL	BH72-LITE	BH72 (Without Charging stand)	BH72 (With Charging stand)	BH76 (Without Charging stand)	BH76 (With Charging stand)
PHYSICAL FEATURES					
Ear Piece	Binaural (Dual Earpiece) - BH72-LITE-BLK-USBA - BH72-LITE-GRY-USBA - BH72-LITE-BLK-USBC - BH72-LITE-GRY-USBC	Binaural (Dual Earpiece) - BH72-BLK-USBA - BH72-GRY-USBA - BH72-BLK-USBC - BH72-GRY-USBC	Binaural (Dual Earpiece) - BH72-BLK-ST-USBA - BH72-GRY-ST-USBA - BH72-BLK-ST-USBC - BH72-GRY-ST-USBC	Binaural (Dual Earpiece) - BH76-BLK-USBA - BH76-GRY-USBA - BH76-BLK-USBC - BH76-GRY-USBC	Binaural (Dual Earpiece) - BH76-BLK-ST-USBA - BH76-GRY-ST-USBA - BH76-BLK-ST-USBC - BH76-GRY-ST-USBC
Primary Connection / Interface	Bluetooth	Bluetooth	Bluetooth	Bluetooth	Bluetooth
Alternate Connection / Interface	N/A	N/A	N/A	N/A	N/A
Call Management Control Unit	•	•	•	•	•
Quick Disconnect (QD) Cord	N/A	N/A	N/A	N/A	N/A
Easy Ear Cushion Replacement	N/A	N/A	N/A	N/A	N/A
Ear Cushion Type	Leatherette	Leatherette	Leatherette	Leatherette	Leatherette
Wireless Connectivity	Bluetooth	Bluetooth	Bluetooth	Bluetooth	Bluetooth
Range	30m	30m	30m	30m	30m
Talk Time	35 Hours	35 Hours	35 Hours	35 Hours	35 Hours
USB Hub	N/A	N/A	N/A	N/A	N/A
Screen	N/A	N/A	N/A	N/A	N/A
FEATURES KEYS AND INDICATORS					
Noise Cancelling Microphone	•	•	•	•	•
Audio	Dynamic EQ (20Hz-20 kHz)	Dynamic EQ (20Hz-20 kHz)	Dynamic EQ (20Hz-20 kHz)	Dynamic EQ (20Hz-20 kHz)	Dynamic EQ (20Hz-20 kHz)
Microsoft Teams Integration	•	•	•	•	•
YEALINK INTEGRATION					
Yealink Phone Integration	N/A	N/A	N/A	N/A	N/A
Yealink Device Management	•	•	•	•	•
Desktop Phone Models Supported	T43U, T46U, T48U, T53W, T54W, T57W, T58W, T58W-PRO, VP59, MP54 (via BT41), MP50 (via BT50), MP56, MP58	T43U, T46U, T48U, T53W, T54W, T57W, T58W, T58W-PRO, VP59, MP54 (via BT41), MP50 (via BT50), MP56, MP58	T43U, T46U, T48U, T53W, T54W, T57W, T58W, T58W-PRO, VP59, MP54 (via BT41), MP50 (via BT50), MP56, MP58	T43U, T46U, T48U, T53W, T54W, T57W, T58W, T58W-PRO, VP59, MP54 (via BT41), MP50 (via BT50), MP56, MP58	T43U, T46U, T48U, T53W, T54W, T57W, T58W, T58W-PRO, VP59, MP54 (via BT41), MP50 (via BT50), MP56, MP58
DECT Phone Models Supported (via 3.5mm)	N/A	N/A	N/A	N/A	N/A
ACCESSORIES (OPTIONAL)					
Busylight Bar	N/A	N/A	N/A	N/A	N/A
Neckband	N/A	N/A	N/A	N/A	N/A
Wireless Mobile Phone Charger	N/A	N/A	N/A	N/A	N/A
Wireless Charging	N/A	Optional	•	Optional	•



MODEL	A20	A30	MVC320	MVC400	MVC640	MVC660	MVC840	MVC860	MVC940	MVC960
Microsoft Teams Certified	•	•	•	•	•	•	•	•	•	•
CAMERA FEATURES										
Lens & Image Sensor	20MP with SONY 1-inch CMOS	20MP lens with SONY 1-inch CMOS (SUltra wide camera); 8MP lens (PTZ camera)	1/2.5" CMOS, 8.51M pixel	20MP	4K	8MP, Sony Sensor	4K	8MP, Sony Sensor	4K	8MP, Sony Sensor
Maximum Frame Rate	60fps	60fps	30fps	30fps	30fps	30fps	30fps	30fps	30fps	30fps
Field Of View	133 Degrees	133 Degree (SUltra wide camera); 90degree (PTZ camera)	120 Degrees	133 Degrees	73 Degrees (Horizontal) 45 Degrees (Vertical)	90 Degrees - PTZ Camera 120 Degrees - Panoramic Camera	73 Degrees (Horizontal) 45 Degrees (Vertical)	90 Degrees - PTZ Camera 120 Degrees - Panoramic Camera	73 Degrees (Horizontal) 45 Degrees (Vertical)	90 Degrees - PTZ Camera 120 Degrees - Panoramic Camera
Zoom	4x Digital	10x Hybrid zoom (PTZ camera)	3x Digital	8x e-PTZ	12x Optical 3x Digital	12x Optical 1.7x Digital	12x Optical 3x Digital	12x Optical 1.7x Digital	12x Optical 3x Digital	12x Optical 1.7x Digital
VIDEO FEATURES										
Video Call Quality	Up to 4K 30fps	Up to 4K 30fps	Up to 4K 30fps	Up to 1080p 30fps	Up to 4K 30fps	Up to 4K 30fps	Up to 4K 30fps	Up to 4K 30fps	Up to 4K 30fps	Up to 4K 30fps
Local HD Recording	•	•	•	•	•	•	•	•	•	•
AUDIO FEATURES										
Microphone	Built-in 8 MEMS microphone array	Built-in 8 MEMS microphone array	MSpeech - 7 MEMS microphone array	Built-in 8 MEMS microphone array	MSpeech - 7 MEMS microphone array (MVC640-CX-050) CPW90 - Wireless microphone (MVC640-CX-51X)	MSpeech - 7 MEMS microphone array	VCM34 - Built-in 3-microphone array	VCM34 - Built-in 3-microphone array	VCM34/VCM36/VCM38 (optional - not included)	VCM34/VCM36/VCM38 (optional - not included)
Voice Pickup Distance	6m	6m	6m	6m	6m	6m	6m	6m	6m	6m
Expansion Microphines	N/A	N/A	N/A	N/A	Up to 4 per system	N/A	Up to 6 per system	Up to 6 per system	Up to 8 per system (none included)	Up to 8 per system (none included)
Yealink Noise Proof Technology	•	•	N/A	•	•	•	•	•	•	•
Speaker	Built-in, 5W Output	Built-in, 10W Output	MSpeech - 4W HD Speaker	Built-in	MSpeech - 4W HD Speaker (MVC640-CX-050) Yealink Soundbar - (MVC640-CX-51X)	MSpeech - 4W HD Speaker	Yealink Soundbar	Yealink Soundbar	Not included	Not included
AI FEATURES										
Auto Framing	•	•	•	•	•	•	•	•	•	•
Speaker Tracking	•	•	N/A	•	N/A	•	N/A	•	N/A	•
AI Face Enhancement	N/A	N/A	N/A	•	N/A	N/A	N/A	N/A	N/A	N/A
CONTROLLER										
Remote Control	Yealink VCR20 (A20-010)	Yealink VCR20 (A30-010)	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Touch Controller	Yealink CTP18 (A20-020)	Yealink CTP18 (A30-020)	Yealink MTouch II	Yealink MTouch II	Yealink MTouch II	Yealink MTouch II	Yealink MTouch II	Yealink MTouch II	Yealink MTouch II	Yealink MTouch II
COLLABORATION FEATURES										
Whiteboard	•	•	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Wireless Content Sharing	•	•	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Annotation on Content Sharing	•	•	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Multi-Screen Iteration	•	•	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Reverse Control	With WPP20	With WPP20	With WPP20	With WPP20	With WPP20	With WPP20	With WPP20	With WPP20	With WPP20	With WPP20
NETWORK & SECURITY										
Wi-Fi	Dual-band (2.4GHz and 5GHz)	Dual-band (2.4GHz and 5GHz)	Dual-band (2.4GHz and 5GHz)	Dual-band (2.4GHz and 5GHz)	Dual-band (2.4GHz and 5GHz)	Dual-band (2.4GHz and 5GHz)	Dual-band (2.4GHz and 5GHz)	Dual-band (2.4GHz and 5GHz)	Dual-band (2.4GHz and 5GHz)	Dual-band (2.4GHz and 5GHz)
Bluetooth	Bluetooth 4.2	Bluetooth 4.2	Bluetooth 4.2	Bluetooth 4.2	Bluetooth 4.2	Bluetooth 4.2	Bluetooth 4.2	Bluetooth 4.2	Bluetooth 4.2	Bluetooth 4.2
Encryption	SRTP/TLS/H.235/AES 256-bit	SRTP/TLS/H.235/AES 256-bit	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
PHYSICAL CONNECTIONS										
HDMI Output	2	2	2	2	2	2	2	2	2	2
Video Input for Content	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Line-In / Line-Out	1x 3.5mm line-in, 1x 3.5mm line-out	1x 3.5mm line-in, 1x 3.5mm line-out	N/A	N/A	N/A	N/A	N/A	N/A	N/A	1x 6.3mm line-in, 1x 6.3mm line-out
USB Interface	2 x USB2.0	2 x USB2.0	4 x USB3.0	4 x USB3.0	4 x USB3.0	4 x USB3.0	4 x USB3.0	4 x USB3.0	4 x USB3.0	4 x USB3.0
Network Interface	1 x 10/100/1000Mbps	1 x 10/100/1000Mbps	1 x 10/100/1000Mbps	1 x 10/100/1000Mbps	1 x 10/100/1000Mbps	1 x 10/100/1000Mbps	1 x 10/100/1000Mbps	1 x 10/100/1000Mbps	1 x 10/100/1000Mbps	1 x 10/100/1000Mbps



2 YEAR WARRANTY

MODEL	MEETINGEYE 400	MEETINGEYE 600	VC200	VC800
CAMERA FEATURES				
Lens & Image Sensor	20MP with SONY 1-inch CMOS	20MP lens with SONY 1-inch CMOS (SUltra wide camera); 8MP lens (PTZ camera)	8MP Colour Image Sensor	2MP Colour Image Sensor
Maximum Frame Rate	60fps	60fps	30fps	60fps
Field of View	133 Degrees	133 Degrees (SUltra wide camera); 90 Degree (PTZ camera)	103 Degrees	70 Degrees
Zoom	4x Digital	10x Hybrid Zoom (PTZ camera)	4x Optical	12x Optical
VIDEO FEATURES				
Video Call Quality	Up to 4K 30fps	Up to 4K 30fps	Up to 1080p 30fps	Up to 1080p 60fps
Local HD Recording	•	•	•	•
Video Codec	H.265, H.264 High Profile, H.264, H.263, H.263+	H.265, H.264 High Profile, H.264, H.263, H.263+	H.265, H.264 High Profile, H.264, H.263, H.263+	H.265, H.264 High Profile, H.264, H.263, H.263+
AUDIO FEATURES				
Microphone	Built-in 8 MEMS microphone array	Built-in 8 MEMS microphone array	Built-in 6 beamforming microphone array	VCM34 - Built-in 3-microphone array
Voice Pickup Distance	6m	6m	5m	6m
Expansion Microphones	Optional - CPW90	Optional - CPW90	Optional	up to 4 per system
Yealink Noise Proof Technology	•	•	•	•
Speaker	Built-in, 5W output	Built-in, 10W output	N/A	N/A
Audio Codec	ARES, Opus (8-48kHz), G.722.1C, G.722.1, G.722, G.711 (PCMU/PCMA), G.729	ARES, Opus (8-48kHz), G.722.1C, G.722.1, G.722, G.711 (PCMU/PCMA), G.729	ARES, Opus (8-48kHz), G.722.1C, G.722.1, G.722, G.711 (PCMU/PCMA), G.729	ARES, Opus (8-48kHz), G.722.1C, G.722.1, G.722, G.711 (PCMU/PCMA), G.729
AI FEATURES				
Auto Framing	•	•	N/A	N/A
Speaker Tracking	•	•	N/A	N/A
AI Face Enhancement	N/A	N/A	N/A	N/A
CONTROLLER				
Remote Control	Yealink VCR20	Yealink VCR20	Yealink VCR11	Yealink VCR11
Touch Control	Optional - Yealink CTP18 or CTP20	Yealink CTP18	Optional	Yealink CTP20
COLLABORATION FEATURES				
Whiteboard	•	•	•	•
Wireless Content Sharing	•	•	•	•
Annotation on Content Sharing	•	•	•	•
Multi-Screen Iteration	•	•	•	•
Reverse Control	With WPP20	With WPP20	With WPP20	With WPP20
NETWORK & SECURITY				
Wi-Fi	Dual-band (2.4GHz and 5GHz)	Dual-band (2.4GHz and 5GHz)	Dual-band (2.4GHz and 5GHz)	Optional - via WF50
Bluetooth	Bluetooth 4.2	Bluetooth 4.2	Bluetooth 4.2	N/A
Encryption	SRTP/TLS/H.235/AES 256-bit	SRTP/TLS/H.235/AES 256-bit	SRTP/TLS/H.235/AES 256-bit	SRTP/TLS/H.235/AES 256-bit
PHYSICAL CONNECTIONS				
HDMI Output	2	2	1	2
Video Input for Content	N/A	N/A	N/A	N/A
Line-In / Line-Out	1x 3.5mm line-in, 1x 3.5mm line-out	1x 3.5mm line-in, 1x 3.5mm line-out	1 x 3.5mm line output	•
USB Interface	2 x USB2.0	2 x USB2.0	2 x USB2.0	4 x USB2.0
Network Interface	1 x 10/100/1000Mbps	1 x 10/100/1000Mbps	1 x 10/100Mbps	1 x 10/100Mbps

Yealink

SPEAKERPHONES



Certified for

Skype for Business

Certified for

Microsoft Teams



Certified for

Skype for Business

Certified for

Microsoft Teams

2 YEAR WARRANTY		
MODEL	CP700	CP900
HARDWARE		
Voltage Rating	5V/500mA (USB)	5V/500mA (USB)
AUDIO FEATURES		
Internal Microphone Array	2 Omnidirectional	6 MEMS MIC
Voice Pickup	360 Degree	360 Degree
Speaker	5W	7W
Echo Cancellation	AEC	AEC
Noise	Noise Suppression	Noise Suppression
INTERFACE		
Ethernet Interfaces	N/A	N/A
PoE	N/A	N/A
Microphone Ports	N/A	N/A
USB	1 x USB 2.0	1 x USB 2.0
Mobile Phone/PC Port	N/A	N/A
FEATURES		
HD Voice	•	•
Wi-Fi Support	N/A	N/A
Bluetooth Support	Built-in	Built-in
Speakerphone	Full Duplex	Full Duplex
Recording	N/A	N/A
Cordless	•	•
USB Cable	0.9m Length	0.9m Length
Talk / Standby Times	Talk 10 Hours, Standby 360 Days	Talk 12 Hours, Standby 450 Days

Yealink

TECHNOLOGY PARTNERS

3CX

 Microsoft Teams

metaswitch

 broadsoft
broadcloud

 broadsoft
broadworks

 elastix®
FREEDOM TO COMMUNICATE

 COREDIAL®

 Yeastar

 GENBAND™

 centile

 Thirdlane

 flowroute®

zoom

 XORCOM

 Skype for Business

 PORTA
ONE

 epygi

 NFON

 HUAWEI